
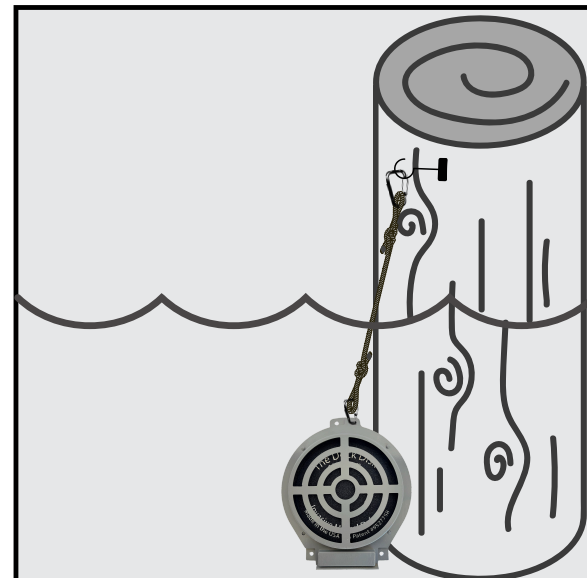


HANGING INSTRUCTIONS

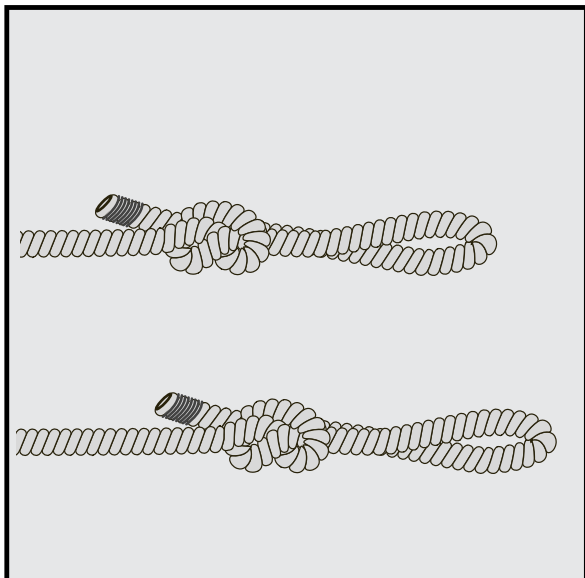

HANGING INSTRUCTIONS CONT.

- **PULL THE DOCK DISK ASSEMBLY FROM THE PLASTIC SHIPPING BAG**
- **CONNECT ONE CARABINER TO THE CLAMSHELL WITH THE DOCK DISK ALREADY INSIDE.**
- **TYING OFF, DETERMINE THE DESIRED LENGTH OF CORD AND TIE A LOOP AT EACH END.**
- **CONNECT THE OTHER CARABINER TO ONE END OF THE ROPE AND THE CARABINER ATTACHED TO THE CLAMSHELL TO THE OTHER END.**
- **ATTACH TO THE DOCK USING AN EYE SCREW OR TIE ONTO YOUR BOAT BUMPERS OR RAILS, INSERTING THE CLAMSHELL AND DISK INTO THE WATER.**

IF THE DOCK DISK SYSTEM IS PHYSICALLY ATTACHED TO THE BOAT, PULL IT OUT OF THE WATER BEFORE TROLLING OR MOTORING AWAY.

CAUTION: TRAVELING AT HIGH SPEEDS COULD DAMAGE THE DOCK DISK AND/OR ITS HANGING SYSTEM, RESULTING IN POSSIBLE LOSS OR INEFFECTIVENESS OF THE PRODUCT.

WHEN AT ANCHOR, SIMPLY PLACE THE DISK IN THE WATER TO PROVIDE PROTECTION AGAINST ZEBRA AND QUAGGA MUSSELS.

NOTE: THIS IS A FOAM-BASED PRODUCT AND WILL TAKE SOME TIME TO SATURATE AND SINK.

KEEP THE DOCK DISK IN A COOL, DRY PLACE UNTIL READY TO USE